




SERVICING W.A | RESIDENTIAL & COMMERCIAL

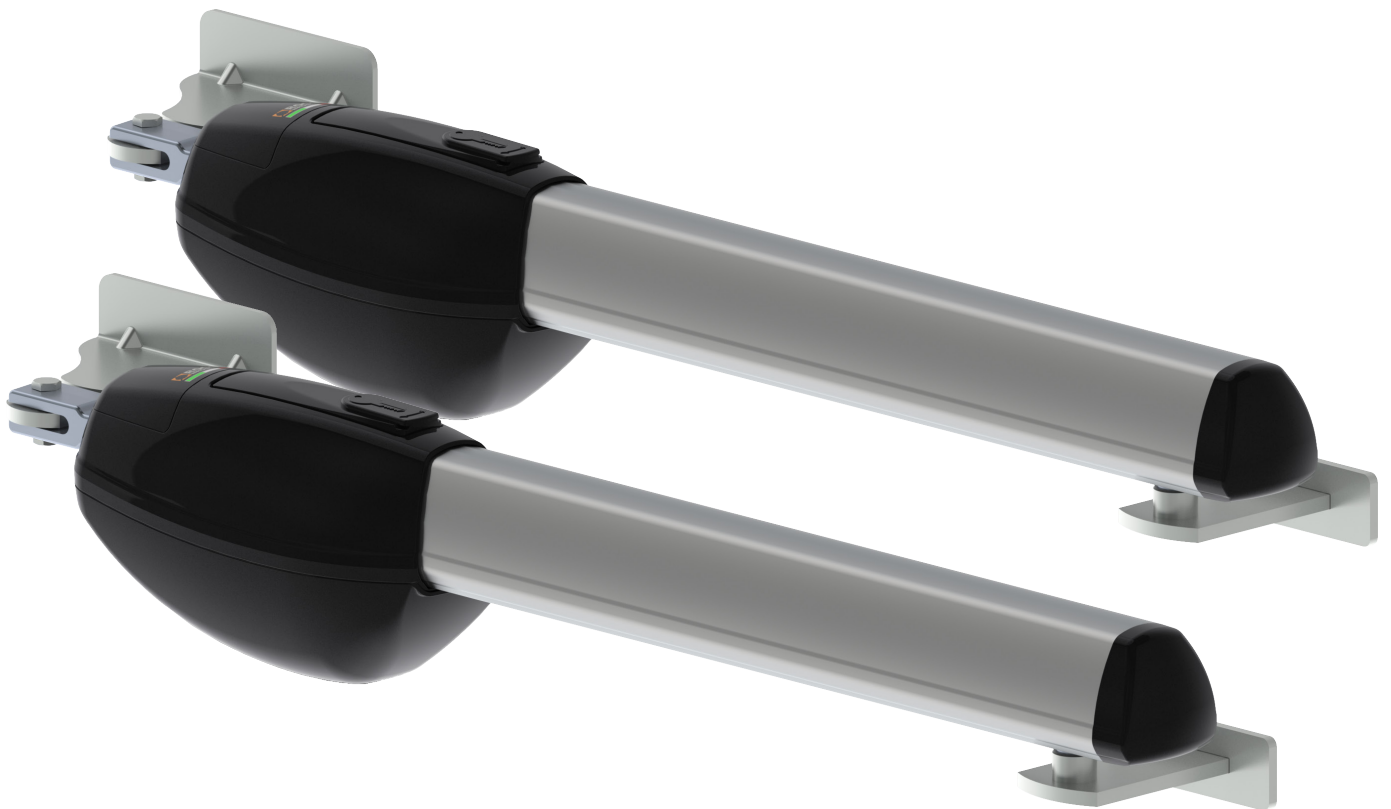

T E C H N I C A L D A T A S H E E T

P R E S T O



Electromechanical **HIGH SPEED BRUSHLESS** motor, low voltage, super intensive use, **BE20/200/HS** ideal for swing gates up to 200kg and 2.5m wide. **BE20/400** ideal for swing gates up to 400kg and 4m wide with mechanical stopper in opening and closing.

Variant SKU	BE20-200-HS	BE20-400
Max Gate Weight	300kg	400kg
Max Gate Length	2.5m per leaf	4m per leaf
Opening Time at 90°	10-15s	17-26s
Power Line Supply	230V AC - 50Hz	
Motor Supply Voltage	36V AC	
Power Rating	200W	200W
Duty Cycle	100% Intensive Use	
Thrust	100 - 2200N	100 - 2800N
Operating Temperature	-20+55°C	
Protection Level	IP44	
Reductor Type	Irreversible	
Mechanical Stopper	Worm drive with mechanical stopper in opening and closing	
Backup Batteries	Optional 2 external battery 12V 7AH (Separate Enclosure)	
Control Board	EDGE-1	
Encoder	Digital encoder SENSORLESS 48 PPR	
Manoeuvre Speed	3 cm/s	1.66 cm/s
Stroke	400mm	550mm

ROGER TECHNOLOGY

PRESTO 200/400



10-26s



300-400



Warranty


 100%
Duty Cycle

Recommended Accessories:



Remote

Universal Control System



Back-up Battery

External Battery Back-up 36V



Pro Mount

Fits a 100mm square post




Photocells


15m Range

Dimensions:

BE20/200/HS - BE20/400

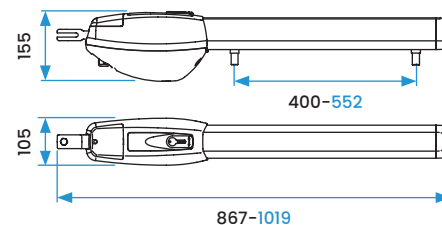




Operating Limits

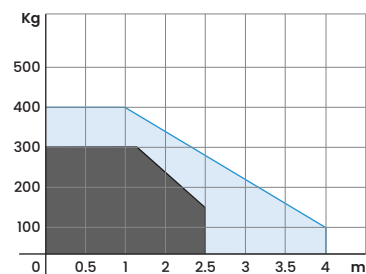 ■ BE20/200/HS
 ■ BE20/400


Typical Swing Gate Set Up

1. Control Box
2. Antenna/Fashing Light
3. Keypad/Exit Button
4. Safety Beam
5. Motor
6. Loop Detector/Probe
7. Gate Stop

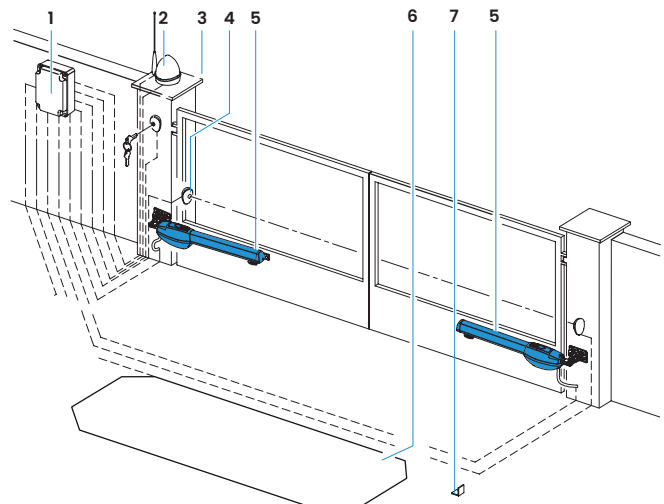

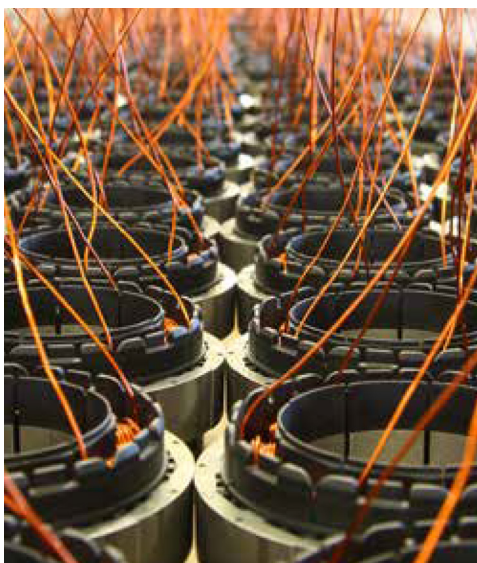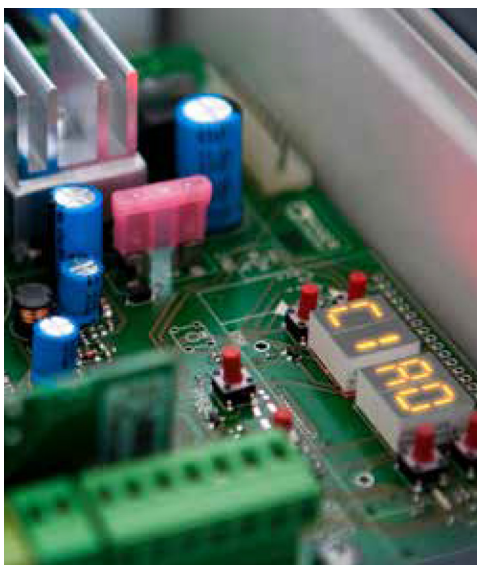

▪ **Brushless Digital Motor**

Features a compact design with neodymium iron-boron magnets, available in 24V & 36V AC versions, operating at ambient temperature with low consumption.

▪ **Speed & Acceleration With Maximum Safety**

Controls motor torque precisely for smooth acceleration and deceleration, ensuring safety.

▪ **Super Intensive Use**

Operates at low voltage with a 100% duty cycle, maintaining low energy consumption.

▪ **External Transformer For Heavy Gates**

Low voltage options reduce installation costs where high voltage is unavailable.

▪ **Extremely Low Energy Consumption**

Consumes about 1/3 the power of other brands for the same gate weight and speed.

▪ **Amazingly Quiet**

Precision gearing and smooth torque control result in very quiet operation, ideal for residential applications.

▪ **Mechanical Stops**

Worm drive with mechanical stops.

▪ **Standby Batteries**

Emergency battery backup system available, with optional 'fail open' setting during power outages.

▪ **Multifunctional Digital Display**

4-quadrant display with 6 function keys for parameter adjustment, error checking, and self-learning.

▪ **High Precision Engineering**

Features premium materials and double shielded ball bearings for precise alignment and durability.

▪ **Reinforced Aluminum Body**

Aluminum housing reinforced with titanium and epoxy-painted for weather protection.

▪ **Sustainability**

Roger Technology is a green customer-centric company dedicated to creating sustainable products through environmentally responsible production processes, innovative technologies, and a culture that prioritizes the health, safety, and development of its workers and customers.



SERVICING W.A | RESIDENTIAL & COMMERCIAL

AGM Automation

U4/12 Carbon Court Osborne Park, WA 6017

Phone: 9244 8899

agmautomation.com.au

