

GL1010 (V90-7924) Viro electric gate lock



Installation: vertical or horizontal

Backset: 70 mm


Functions:

- service (standard): the lock opens with the electric impulse and only resets once the door/gate has been opened and then closed. It is therefore suitable for use with door closers and/or all types of automation systems.
- security (selected by manually removing an internal part): the lock opens only when electric impulse and manual or automatic pressure are applied simultaneously. It is therefore not advisable to use it with a door closer and/or unsuitable automation systems.
- Double replaceable coil: which distributes the load uniformly and ensures a long working life
- Voltage: standard 12V AC
- Case: one-piece galvanized steel
- Cover with handle: galvanized steel
- Striker: galvanized steel, to ensure the correct working of the lock even if there is vertical adjustment between the lock and the striker (caused by weather changes)

Cylinder:

- solid brass, fixed internal, fixed external. Keys: supplied with 3 Viro profile nickel-plated brass keys.
- Mechanism (version with round cylinder):
 - brass pins;
 - mushroom brass counter pins, pick-resistant;
 - phosphor bronze pin springs.
- **Supplied with**: galvanized steel striker for horizontal installation [for vertical installation, order the specific galvanized steel floor striker], galvanized steel roof-plate for horizontal installation and fixing screws.

Dimensions

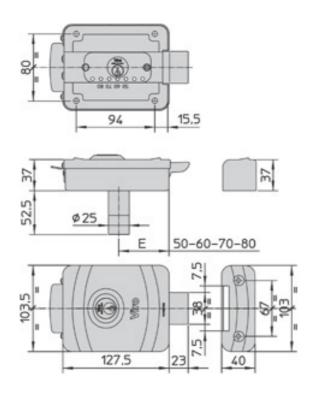

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The Guardall policy is one of continual development and improvement, therefore Guardall reserves the right to change specifications without notice

GUARDALL © All rights reserved.

