



## J355HA M30-P1

New automatic high security & antiterrorist bollard  
ASTM certified

**FAAC**

*Simply automatic.*

# J355HA M30-P1

## RISING TO THE CHALLENGE OF PERIMETER SECURITY



J355HA M30-P1 is the new FAAC retractable bollard conceived for **perimeter security applications**.

This product has been specifically designed for the protection of sensitive areas such as: airports, embassies, consulates, public offices, banks, marina, etc.

It has been tested in accordance to "ASTM F 2656-07 – American Standard Test Method for Vehicle Crash Testing of Perimeter Barriers" and successfully ranked with the **highest class (P1)**

J355HA M30-P1 Bollard can therefore arrest a 6800 Kg truck running at a speed of about 50 Km/hour (30 Mph) in less than 1m (P1)!

To further enhance the level of protection offered, is available also an EFO (Emergency Fast Operation) special version. The rising speed is ~1,5 sec in J355 M30-P1 EFO versions.



### J355HA M30-P1 IS THE FAAC SOLUTION FOR THE INCREASING DEMAND OF SECURITY

- Allows the access to sensitive areas to authorized vehicles only
- Allows free pedestrian flow, preventing at the same time vehicle intrusion

#### Advantages:

- Reduces the aesthetical impact on the surrounding context, thanks to its mobile concealed element
- Optimizes the use of human resources in access control activities
- Guarantees a safe movement, thanks to built-in LED lights
- Customizable on-demand color, to match with the urban architecture



# INNOVATIVE SECURITY BOLLARD

**J355HA M30-P1 bollard has a number of exceptional features.**

- Tested in accordance to ASTM F 2656-07 M30 standards, getting the best “penetration rating” (P1).
- All in one concept: bollard has a built-in hydraulic drive unit.
- Emergency Fast Operation circuit -option- for rapid movement (1,5) .
- Upraised position kept by hydraulic blocking, even in case of power failure.
- 16mm steel cylinder, treated with cataphoresis and painted- satin stainless steel version available.
- No pipes with oil under pressure on underground ducts to avoid leakages or failure risks.
- Remarkable duty cycle.
- Central rail piston to provide optimal stability of the cylinder when rising and lowering.
- Built-in LED lights grant good visibility in all directions.
- Junction boxes and connectors are IP 66 ranked.
- Stainless steel internal fixing frames.
- Extremely reliable electronic control unit -JE275-.
- No customized cables requested.



## **Accessories for automatic version**

- Pit heater JH355
- Control unit for one bollard management JE275

## **Options for automatic version**

- RAL painting on request (not available on stainless steel satin finishing)
- Stainless steel satin finishing
- E.F.O. Emergency Fast Operation for faster bollard uprising



## TECHNICAL SPECIFICATIONS

Drive	Hydraulic unit
Rising time	~ 6,0 sec
Rising time with E.F.O.	~ 1,5 sec
Descent time	~ 2,0 sec
Power supply	230 Vac -10% / + 6%; 50 (60)Hz
Max power consumption	1.200 W
Max expressed force	5.000N
Suggested Duty Cycle	Frequent Usage
Cylinder stroke	1000 mm
Cylinder diameter	355 mm
Cylinder steel sheet thickness	16 mm
Cylinder material	S355JR EN10210
Cylinder surface (Painted steel version)	Cataphoresis and polyester powder painted
Standard color	Dark grey metallized RAL 7021
Cylinder surface (Satin stainless steel version)	AISI 316
Head surface treatment	Anticorrosive case aluminum RAL 9006
Reflective strip standard height	55 mm
Impact resistance	150 kJ
Break in resistance	656 kJ
Tested and Certified	In accordance with ASTM F2656-07 - M30-P1
Frame load class	25 Tons (C25)
Supply Cable	16+1 conductors –min. section 1,5mm
Max cable lenght	50 mt
Junction box protection class	IP66
Operating temperature	-15 °C / +55 °C
Operating temperature with heater	-40 °C / +55 °C
Weight	490 Kg (bollard) + 250 Kg (pit)



## PIT (INCLUDED)

Dimensions	L569 x D569 x H1500 mm
Material	Steel sheet alloy, thickness 2mm (+frame to be walled in)
Main frame	Ductile casted iron GS400, treated with cataphoresis



Airports



Banks



Embassies



Military areas

#### AVAILABLE VERSIONS

Model	Finish	Item Code
HA (AUTOM.) SECURITY BOLLARD J355/H1.000	painte steel	116002
HA (AUTOM.) SECURITY BOLLARD J355/H1.000 EFO	painte steel	116003

Pit included

#### AVAILABLE VERSIONS


Model	Finish	Item Code
HA (AUTOM.) SECURITY BOLLARD J355/H1.000	inox stainless steel	116032
HA (AUTOM.) SECURITY BOLLARD J355/H1.000 EFO	inox stainless steel	116033

Pit included

#### ACCESSORIES

Model	Item Code
<b>BOLLARD CONTROL UNIT JE275</b> 1 unit can manage 1 J355HA M30-P1 bollard	116300
<b>PIT HEATER (OPTIONAL)</b>	116202

## INSTALLATION LAYOUT

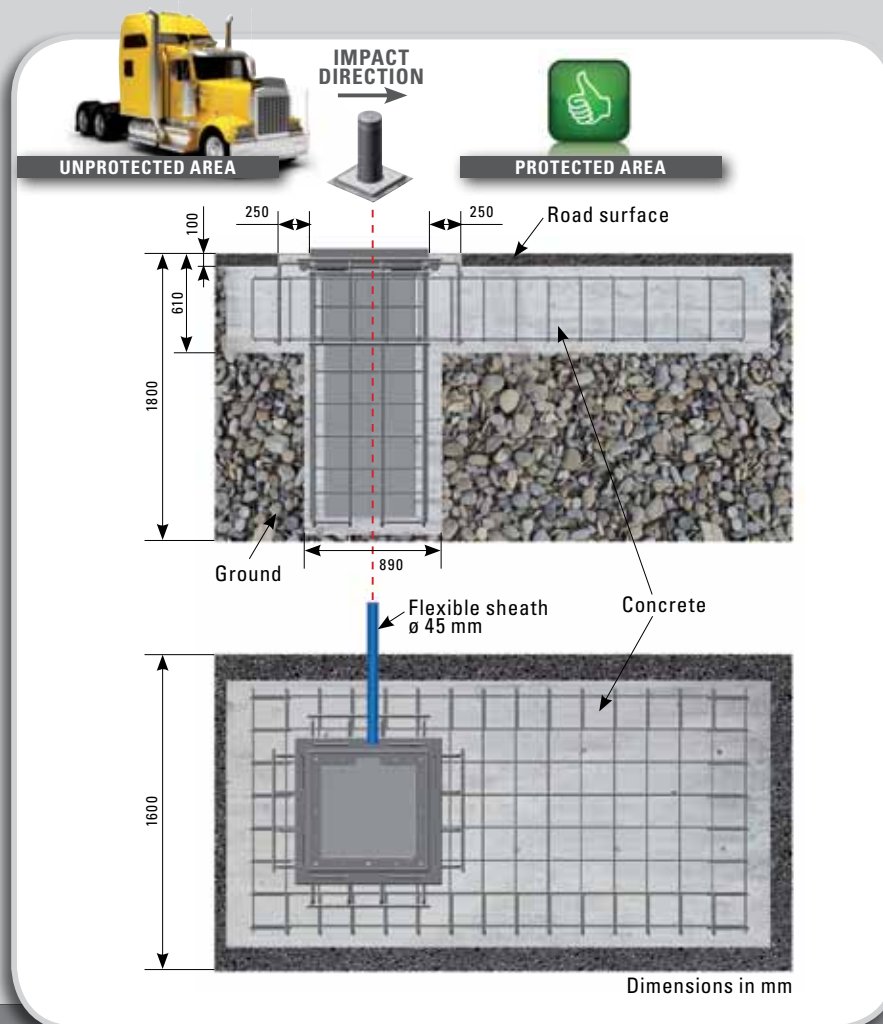

#### NOTE:

1. The foundation concrete can be poured directly into the dug-out area.
2. Concrete specifications:
  - A. Class C25/30
  - B. Concrete with 10-30 aggregate according to UNI EN 12620 standard
  - C. The bollard must be installed after at least 7 days of concrete setting.
3. The compacting index of the surrounding ground must be at least 90% of the "Proctor" optimum curve, according to UNI EN 13286-2:2005 standard.
4. The steel framework must comply with class B450C (ASTM A615 Grade 60).

## HEADQUARTERS

### ITALY

FAAC SpA  
Via Calari 10 - 40069 Zola Predosa (BO)  
Tel. +39 051 61724 - Fax +39 051 758518  
it.info@faacgroup.com - www.faacgroup.com

## SUBSIDIARIES

### AUSTRALIA

FAAC AUSTRALIA PTY LTD  
Homebush – Sydney, Australia  
tel. +61 2 87565644  
fax +61 2 87565677  
www.faac.com.au

### AUSTRIA

FAAC GMBH  
Salzburg, Austria  
tel. +43 662 8533950  
fax +43 662 85339525  
www.faac.at

### FAAC TUBULAR MOTORS

tel. +49 30 56796645  
fax +49 30 22409006  
faactm.info@faacgroup.com  
www.faac.at

### BENELUX

FAAC BENELUX NV/SA  
Brugge, Belgium  
tel. +32 50 320202  
fax +32 50 320242  
www.faacbenelux.com

### FAAC TUBULAR MOTORS

Schaapweg 30  
NL-6063 BA Vlodrop, Netherlands  
tel. +31 475 406014  
fax +31 475 406018  
faactm.info@faacgroup.com  
www.faacbenelux.com

### CHINA

FAAC SHANGHAI  
Shanghai, China  
tel. +86 21 68182970  
fax +86 21 68182968  
www.faacgroup.cn

### FRANCE

FAAC FRANCE  
Saint Priest - Lyon, France  
tel. +33 4 72218700  
fax +33 4 72218701  
www.faac.fr

### FAAC FRANCE - AGENCE PARIS

Massy - Paris, France  
tel. +33 1 69191620  
fax +33 1 69191621  
www.faac.fr

### FAAC FRANCE - DEPARTEMENT VOLETS

Saint Denis de Pile - Bordeaux, France  
tel. +33 5 57551890  
fax +33 5 57742970  
www.faac.fr

### GERMANY

FAAC GMBH  
Freilassing, Germany  
tel. +49 8654 49810  
fax +49 8654 498125  
www.faac.de

### FAAC TUBULAR MOTORS

tel. +49 30 56796645  
fax +49 30 22409006  
faactm.info@faacgroup.com  
www.faac.de

### INDIA

FAAC INDIA PVT. LTD  
Noida – Delhi, India  
tel. +91 120 3934100/4199  
fax +91 120 4212132  
www.faacindia.com

### IRELAND

NATIONAL AUTOMATION LTD  
Co. Roscommon, Ireland  
tel. +353 71 9663893  
fax: +353 71 9663890  
www.nal.ie

### MIDDLE EAST

FAAC MIDDLE EAST FZE  
Dubai Silicon Oasis Operation Center - Dubai, UAE  
tel. + 971 4 3724190  
fax+ 971 4 3724191  
www.faac.ae

### NETHERLANDS

KEMKO BV  
Doetinchem, Netherlands  
tel. +31 314 378777  
fax +31 314 362224  
www.kemko.nl

### NORDIC REGIONS

FAAC NORDIC AB  
Perstorp, Sweden  
tel. +46 435 779500  
fax +46 435 779529  
www.faac.se

### POLAND

FAAC POLSKA SP.ZO.O  
Warszawa, Poland  
tel. +48 22 8141422  
fax +48 22 8142024  
www.faac.pl

### RUSSIA

FAAC RUSSIA  
Moscow, Russia  
tel. +7 (495) 646 24 29  
www.faac.ru

### SPAIN

CLEM, S.A.U.  
San Sebastián de los Reyes - Madrid, Spain  
tel. +34 91 3581110  
fax +34 91 7293309  
www.faac.es

### SWITZERLAND

FAAC AG  
Altdorf, Switzerland  
tel. +41 41 8713440  
fax + 41 41 8713484  
www.faac.ch

### TURKEY

FAAC OTOMATİK GEÇİŞ SİSTEMLERİ  
SAN. VE TİC. LTD. ŞTİ.  
Çağlayan, Kağıthane, İstanbul (Turkey)  
tel.+90 (0)212 - 3431311

### UNITED KINGDOM

FAAC UK LTD.  
Basingstoke - Hampshire, UK  
tel. +44 1256 318100  
fax +44 1256 318101  
www.faac.co.uk

### U.S.A.

FAAC INTERNATIONAL INC  
Jacksonville, FL - U.S.A.  
tel. +1 904 4488952  
fax +1 904 4488958

FAAC INTERNATIONAL INC  
Fullerton, California - U.S.A.  
tel. +1 714 446 9800  
fax +1 714 446 9898  
www.faacusa.com

