

tele-MECH® Systems

Telescopic sliding gate system



All new profile
Aluminium extrusion
Anodised (standard)
Mill finish for powder coating
available upon request.

Complete stand-alone system,
designed to operate two sliding gate
panels simultaneously, specifically to
enable the automation of telescopic sliding gate

Three standard kits available:



- 2M - for gates up to 3.3M
- 3M - for gates up to 5.3M
- 4M - for gates up to 7.3M

Easily assembled and attached to
Steel, Aluminium or Timber gates

SERVICING W.A | RESIDENTIAL & COMMERCIAL

Area Division Table
With 50mm gate over lap

A		A = Boundary width	
E	$E = 1/2 \text{ of } B + 50\text{mm}$	# D = 300mm	C
F	$F = 1/2 \text{ of } B + 50\text{mm}$		
B	$2/3 \text{ of } A - D$ or $A - C$		C = F + D
	Maximum driveway width		Required telescopic allocation

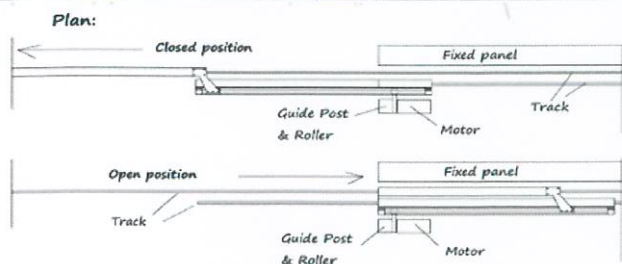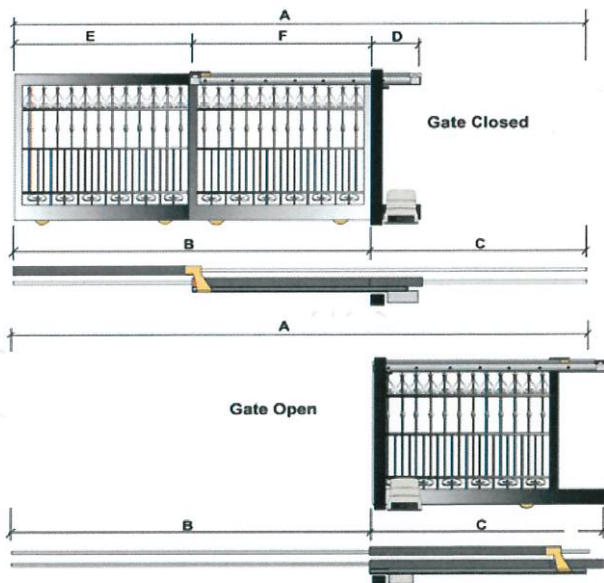

sasautogate copyright 2013 - all rights reserved - against all unauthorised duplication and distribution of images and text enclosed in this document
"tele-MECH" is a registered trade mark - 2006 under Building automation installation class 9 Australia, trade marks act 1995